

# TANDO 700

High-precision measuring and analysis system for dissipation/power factor and capacitance



# High-voltage insulation testing made safe, easy and reliable

## Why dissipation/power factor and capacitance?

The condition of insulation is essential for secure and reliable operation of high-voltage (HV) electrical equipment. Measuring dissipation/power factor (Tan Delta) and capacitance helps you to determine overall insulation condition of:

- > Rotating machines (motors and generators)
- > High-voltage cables and cable accessories
- > Distribution, instrument and power transformers
- > Bushings
- > Capacitors
- > Circuit breakers

## Early loss detection improves performance

Variations in the dissipation/power factor are often signs of mechanical displacements, the ingress of moisture, partial discharge, aging and degradation in insulation.

By detecting these conditions early, corrective action can be taken to improve the performance and reliability of electrical equipment.

Our TANDO 700 system provides you with a precise and extremely safe measuring solution that makes insulation tests easier and more reliable. It can be used for insulation material tests in research labs as well as production quality checks in factory HV test fields.





## Complete testing and analysis with TANDO 700

TANDO 700 is a complete digital test and analysis system used to measure dissipation/power factor and capacitance in the insulation of high-voltage equipment.

#### Flexible testing solution

TANDO 700 measures both ungrounded and grounded test objects, since it can be operated on HV potential. The system is compatible with any type of reference capacitor for testing a variety of HV equipment

TANDO 700 can directly measure currents in a dynamic range from 5  $\mu$ A to 1 A. The input range can be extended up to 28 A by means of optional external shunts.

#### Compact, portable design

TANDO 700 includes two measuring units and a fiber optic converter, which is linked with a USB connection to any desktop PC, rack-mounted computer or laptop. This simple system design enables easy transport to various lab and field areas.

#### Highly precise, reliable data

The robust TANDO 700 provides you with extremely high measurement accuracy (typical < 5 x 10<sup>-6</sup>). It is suitable for use in environments with interference, such as in power plants, substations and unscreened test labs. The system continuously verifies signal quality through Fast Fourier Transformation (FFT) analysis.

#### Long, continuous measurement

TANDO 700 measurement channels are equipped with a powerful internal battery. The system's low power consumption allows for long measuring periods without having to recharge the internal battery.

#### Safe, plug-and-play operation

The easy-to-use TANDO 700 software automatically recognizes connected hardware for easy plug-and-play operation. Fiber optic connections ensure complete galvanic isolation for superior safety in HV areas.

#### Additional measurements

TANDO 700 also measures power, voltage, current, impedance and frequency. All measurement data is displayed and analyzed in real time. The modular system can also be used with our MPD 600 for simultaneous measurement and analysis of partial discharges.



## **TANDO 700**

- > Very high measurement accuracy in environments with interference
- > Galvanic isolation for optimum safety
- Large input measurement range for a wide variety of HV test objects
- Compact design for easy transport to various testing areas
- Plug-and-play operation for quick system setup

→ www.omicron.at/tando700


## Customizable data display and reporting

## All essential information at a glance


TANDO 700 includes easy-to-use software for system management as well as comprehensive data analysis, display and customized reporting. All essential information is available to you in real time.

The tab-based navigation lets you choose from a variety of display possibilities for viewing measurement values. You can also select which measurement parameters and trends are captured, saved and included in reports.

#### TANDO 700 software dashboard – System view

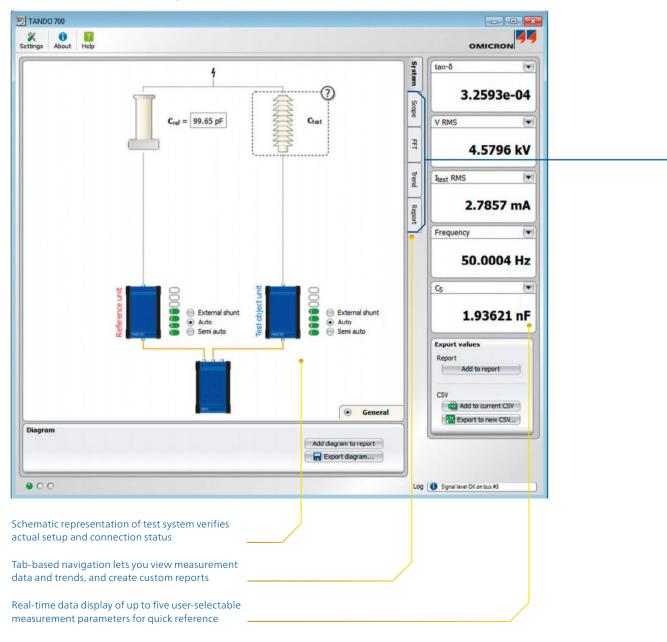

#### FFT view

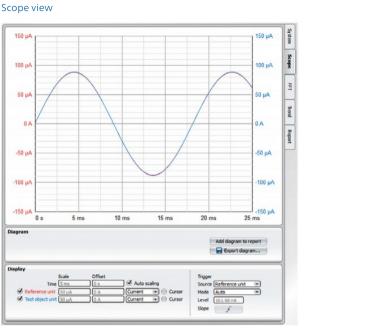


Graph of real-time input signals from the measuring units

- > Visualizes quality of incoming input signals
- > Data export for reports in BMP, PNG or JPG formats



Visual historic summary of measurement values

- > Display of up to five user-selected values
- > Recordings made at user-specified time intervals



Fast Fourier Transformation (FFT) detects interference

- > FFT graph displays signal-to-noise ratio of input signals
- > Signal status is updated continuously

#### Report view

System

Scope FFT

Trend Report

	cification			OMICRON
▼ General				
Report name			Customer	
Order number			Location	
Tested by			Address	
Time and date	00:00:00 - 2000-01-	01	Telephone	
Summary				
▼ Asset				
Asset type			Manufact. year	
Manufacturer			Manufact. type	
Serial number			Insulation type	
Nominal voltage	[o v			
▼ Test Conditions				
Ambient temp.	0 °C		Relative humidity	0 %
Insulation temp.	[o ℃		Weather	
▼ Custom				
Custom field 1			Custom field 3	
Custom field 2			Custom field 4	
Captured Value     Time	⇒ tan-õ ▼	V RMS ¥	I test RMS ▼	Prequency V Cs V
Time <b>v</b>	tan-ő ♥	V RMS ¥	I test RMS ¥	
Time ▼ Analysis ③ Dissipation / j	tan-ō ▼	V RMS ¥	I test RMS ¥	
Time ▼ ▼ Analysis ③ Dissipation / X-axi	tan-ō ¥	V RMS ♥ Y-axis [tan-ô	1 test RMS ¥	
Time ▼     Analysis     Ø Dissipation //     X-axi     Ø Voltage over	tan-5 *			
Analysis     Ø Dissipation // X-axi     Ø Voltage over X-axi	tan-ô *	Y-axis V RMS	1 test RMS ¥	
<ul> <li>✓ Analysis</li> <li>✓ Dissipation // X-axi</li> <li>✓ Voltage over X-axi</li> <li>✓ Dissipation //</li> </ul>	ton-5 *	Y-axis (V RMS		
Analysis     Osspation //     X-axi     Voltage over     X-axi     Dissipation //     X-axi     Dissipation //     X-axi	ton-5 ¥	Y-axis V RMS		
Y Analysis	ton-5 ♥ power factor over time (Time ) Time ) Time ) (Time )	Y-axis ( <u>V RMS</u> Y-axis ( <u>tan-ð</u>	•	
Y Analysis	ton-5 ¥	Y-axis (V RMS		
<ul> <li>Time ▼</li> <li>Analysis</li> <li>Ø Despaton / , X-axi</li> <li>Veltage over X-axi</li> <li>Ø Despaton / , X-axi</li> <li>Ø Capacitance X-axi</li> <li>Specification</li> </ul>	power factor over time s (mm ) (mm ) (mm ) (mm ) (mm ) (mm	Y-axis ( <u>V RMS</u> Y-axis ( <u>tan-ð</u> Y-axis ( <u>Cs</u>	* *	Remove selected rows
Time ♥ ♥ Analysis Ø Disspation / / X-axi Ø Ustage over X-axi Ø Disspation / / Ø Disspation / / Ø Capacitance X-axi	power factor over time s (mm ) (mm ) (mm ) (mm ) (mm ) (mm	Y-axis ( <u>V RMS</u> Y-axis ( <u>tan-ð</u>	•	Remove selected rows
<ul> <li>Time ▼</li> <li>Analysis</li> <li>Ø Despaton / , X-axi</li> <li>Veltage over X-axi</li> <li>Ø Despaton / , X-axi</li> <li>Ø Capacitance X-axi</li> <li>Specification</li> </ul>	power factor over time s (mm ) (mm ) (mm ) (mm ) (mm ) (mm	Y-axis ( <u>V RMS</u> Y-axis ( <u>Lan-ð</u> Y-axis ( <u>Cs</u>	* *	Remove selected rows

Easy creation of customized reports

- > Add your logo and individualize input fields
- > Select measurement values, diagrams and graphs

# Ordering information

## TANDO 700 packages

Description	Order no.
TANDO 700 Standard Package	VE004600
Precision measurement solution for the following high-voltage (HV) assets:	
> Rotating machines (motors and generators)	
> Bushings	
> Capacitors	
> Distribution, instrument and power transformers	
TANDO 700 Advanced Package	VE004601
High-precision measurement solution for all HV assets, particularly:	
> Power cables / cable accessories	
> Research and development	
> Metrology institutes	

## Package components

TANDO 700 standard and advanced packages both include the following components:

#### Hardware

- 1 × TANDO 700 reference unit
- 1 x TANDO 700 test object unit
- 2 × 24W standard battery charger
- $1 \times$  MCU1 fiber optic controller with USB cable

#### Software

1 × TANDO 700 software and documentation CD (Computer not included)

#### Cables and accessories

2 x Duplex fiber optic cables (20m or 50m)

- 1 x Connection cable kit, including:
  - 1 x Reference capacitor connection cable
  - 1 x Connection cable for devices with TNC plug
  - $2\,x$  Coax adapter BNC female to  $2x4\,mm$  male  $180^\circ$
  - $1\,x\,\text{Coax}$  adapter TNC female to BNC male  $180^\circ$
  - 2 x 4 mm banana connection cable, 0.5 mm, red
  - 2 x 4 mm banana connection cable, 0.5 mm, black
  - 2 x Banana clamp red
  - 2 x Banana clamp black

#### Documentation

- 1 × TANDO 700 calibration report
- 1 × TANDO 700 getting started guide

## **Optional accessories**

Description	Order no.
External shunts (4 A, 15 A, 28 A)	
1 × SHT1 Version A: 4 A with connection cable	VEHZ4140
1 × SHT1 Version B: 15 A with connection cable	VEHZ4141
$1 \times$ SHT1 Version C: 28 A with connection cable	VEHZ4142
Battery charger	
Standard 24W battery charger (spare or replacement)	VEHZ4143
Transport case	
Provides space for all package components and up to three shunts	VEHP0046
Software option	
Integration module Includes Microsoft COM® and LabVIEW library	VESM4108
TANDO 700 upgrade	
Upgrade from the TANDO 700 Standard Package to the Advanced Pacakge	VEHO0005





## Technical specifications

#### Standard System

Value	Accuracy <sup>1</sup>	Condition <sup>2</sup>
Dissipation/ power factor	0.1 % rdg. + 1 x 10 <sup>-4</sup>	$5 \ \mu A \le I_{IN} \le 1 \ A$
Capacitance	0.1 % rdg. + 0.1 pF	$5 \ \mu A \leq I_{_{IN}} \leq 1 \ A$
Current	0.1 % rdg. + 0.1 nA	$5 \ \mu A \leq I_{IN} \leq 1 \ A$
Voltage	0.5 % rdg. + 1 V	$10 \text{ pF} \le \text{C}_{\text{Ref}} \le 10 \text{ nF}$

#### Advanced System

	Accuracy <sup>1</sup>		
Value	Typical	Guranteed	Condition <sup>2</sup>
Dissipation/ power factor		0.1 % rdg. + 2 x 10 <sup>-5</sup>	$5 \ \mu A \leq I_{IN} \leq 1 \ A$
Capacitance	0.005 %	0.05 % rdg. + 0.05 pF	$5 \ \mu A \le I_{IN} \le 1 \ A$
Current	< 0.02 %	0.05 % rdg. + 0.05 nA	$5 \ \mu A \le I_{IN} \le 1 \ A$
Voltage	< 0.02 %	0.2 % rdg. + 1 V	$10 \text{ pF} \leq \text{C}_{_{\text{Ref}}} \leq 10 \text{ nF}$

 $^{1}$  The specified accuracies are valid for the frequency of the test voltage at 50/60 Hz, a temperature range of 23 °C ± 5 °C, SINAD of the power source < 12 dB and without errors depending on  $C_{\rm REP}$  input combination and parasitic capacitances.

<sup>2</sup> Without a connected shunt and running the software in Auto Mode.

For detailed range dispersion and pre-conditions for accuracy values, please contact OMICRON Support.

#### System Data

Frequency Range 5 Hz ... 400 Hz

Direct and	d interna	l shunt	input	ranges
------------	-----------	---------	-------	--------

1.2 mA	Impedance	17 Ω		
	Current	0.5 μA 1.2 mA		
200 mA	Impedance	50 Ω		
	Current	1 mA 200 mA		
1 A	Impedance	5.4 Ω		
	Current	10 mA 1 A		
Connection to MCU1				
Fiber optic	Wave length	1300 nm		

5	
Mode	Multimode 50 / 125 $\mu m$
Fiber length	Up to 2 km

#### **Computer Requirements**

Characteristic	Required
Processor	Intel Pentium 4 ( $\geq$ 2.5 GHz), Pentium M ( $\geq$ 1.5 GHz), Core, Core 2 processor or AMD Athlon 64 or Turion 64 processor
Memory	1GB RAM, USB 2.0 Hi-speed compatible
Operating system	Windows 7, Windows 8, Windows 10

#### Calibration certificates

Certificate

PTB calibration mark 20269 - 20273 PTB 14 PTB calibration mark 20269 - 20273 PTB 14 TANDO 700 System

Standard

Advanced

## Parameter

Power Data

Supply voltage (Power input) Power consumption Value

9 V ... 24 V DC, 24 W

Rechargeable lithium battery

2 x Standard connectors for fiber

2 x 4 mm banana red/black plug

1 x 4 pin shunt socket, LEMO FGG

-5 % ... 85 % (non-condensing)

1 x 4 pin DC input socket,

< 100 mW active < 1 mW standby < 15 W charging

3.7 V / 11.6 Ah

Rating

Front:

Minimum 21 days

115 x 175 x 55 mm (4.53 x 6.88 x 2.16 in.)

< 5 kg / 11.36 lbs (without accessories)

optic network

LEMO FFA

Rear:

Rating

-10 °C ... +50 °C -14 °F ... +122 °F -20 °C ... +60 °C

-4 °F ... +140 °F 0 °C ... +40 °C

32 °F ... +104 °F

Internal battery pack

Internal battery charge period

#### Mechanical Data Characteristic

Dimensions (W x D x H)

System package weight

Connections

## Environmental Conditions

Characteristic Operating temperature

Storage temperature

Charging temperature

Humidity

### SHT1 External Shunts

Parameter	Value		
Maximum current	4 A	15 A	28 A
Minimum current	100 mA	1 A	3 A
Nominal resistance	500 mΩ	50 mΩ	15 mΩ
Typical temperature coefficient	2 ppm	2 ppm	2 ppm
Initial resistance accuracy	±0.04 %		
Absolute phase deviation	tan δ < 2 x 10	-5	
Weight	0.68 kg / 1.49	lbs	

## CE Conformity

#### (EMC) Directive 2004/108/EC, (LVD) low-voltage directive 2006/95/EC

EMC	EN 61326-1/2013	Emission: Class A Immunity: Table 2
Safety	UN 38.3 IEC 62133:2012 (ed.2) UL 2054 (ed.2, incl. rev. 2011) TÜV certificate no. B 14 11 179!	55 065
Protection	IEC 60068- /2-6 / 2-27 / 2-78	Vibration, Shock, Damp Heat
	IEC 60529 § 12.2 / § 13.2	IP4X

OMICRON is an international company serving the electrical power industry with innovative testing and diagnostic solutions. The application of OMICRON products allows users to assess the condition of the primary and secondary equipment on their systems with complete confidence. Services offered in the area of consulting, commissioning, testing, diagnosis and training make the product range complete.

Customers in more than 150 countries rely on the company's ability to supply leadingedge technology of excellent quality. Service centers on all continents provide a broad base of knowledge and extraordinary customer support. All of this together with our strong network of sales partners is what has made our company a market leader in the electrical power industry.



For more information, additional literature, and detailed contact information of our worldwide offices please visit our website.